

NLG Non-Conductive D Ring Tool Tether

101375



NLG

NLG Non-Conductive D Ring Tool Tether

Product code: 101375

PRODUCT BRIEF / 101375

Attach the Non-Conductive D Ring Tool Tether with Tether Tape to create an instant metal-free attachment point on any small hand tool.

NLG Non-Conductive D Ring Tool Tethers form part of NLG's unique Instant Tether System for stopping dropped objects and is well established as the preferred option for workers at height. They can be retro-fitted to almost any tool avoiding the unnecessary expense of buying new tools or the associated downtime of sending tools off site to be adapted for tethering.

When used with Tether Tape, the NLG D Ring Tether Points provide a solution to a multitude of tools commonly used at work. This metal-free version is uniquely suited to electrical work or using near sensitive surfaces.

INSTRUCTIONS

- 1 / Select the correct D Ring Tether for your tool.
- 2 / Cut a length of Tether Tape long enough to wrap around the tool at least 8 times. Remove the plastic backing.
- 3 / Check the tool is clean and locate the D Ring Tether, ensuring that the label is facing up. Wrap the Tether Tape around the D Ring Tether, leaving the webbing catch exposed.
- 4 / Ensure that the Tether Tape is firmly stretched during application. The self-fusing technology is activated when stretched between 5-10% and causes it to fuse permanently.
- 5 / Test the tether point before putting the tool into use.

VIDEO GUIDE

Watch online:
neverletgo.com/tool-tether-guide

Specification

- Non-conductive, lightweight ballistic plastic D Ring
- Extended product life with high strength, wear resistant webbing
- Extra deep catch design for ultimate security
- Faster visual inspections with contrast stitching
- Works with Tether Tape
- Unique serial number for easy identification and tracking
- CE marked
- Dynamic load tested and third party certified [2:1 safety factor]
- Dimensions: 60mm x 12mm
- Max Load: 1KG [2.2lbs]

MAX LOAD (SWL)

1KG / 2.2LBS

SERIAL NUMBERED

Makes the management of inspection routines and reports easy and traceable

PRODUCT DATA

Weight: 5 Grams

EAN [GTIN-13]: 5060572180062



HTS Code: 6307.90.9899



Third party
tested and
certified

See the
Test Certificate
on page 5



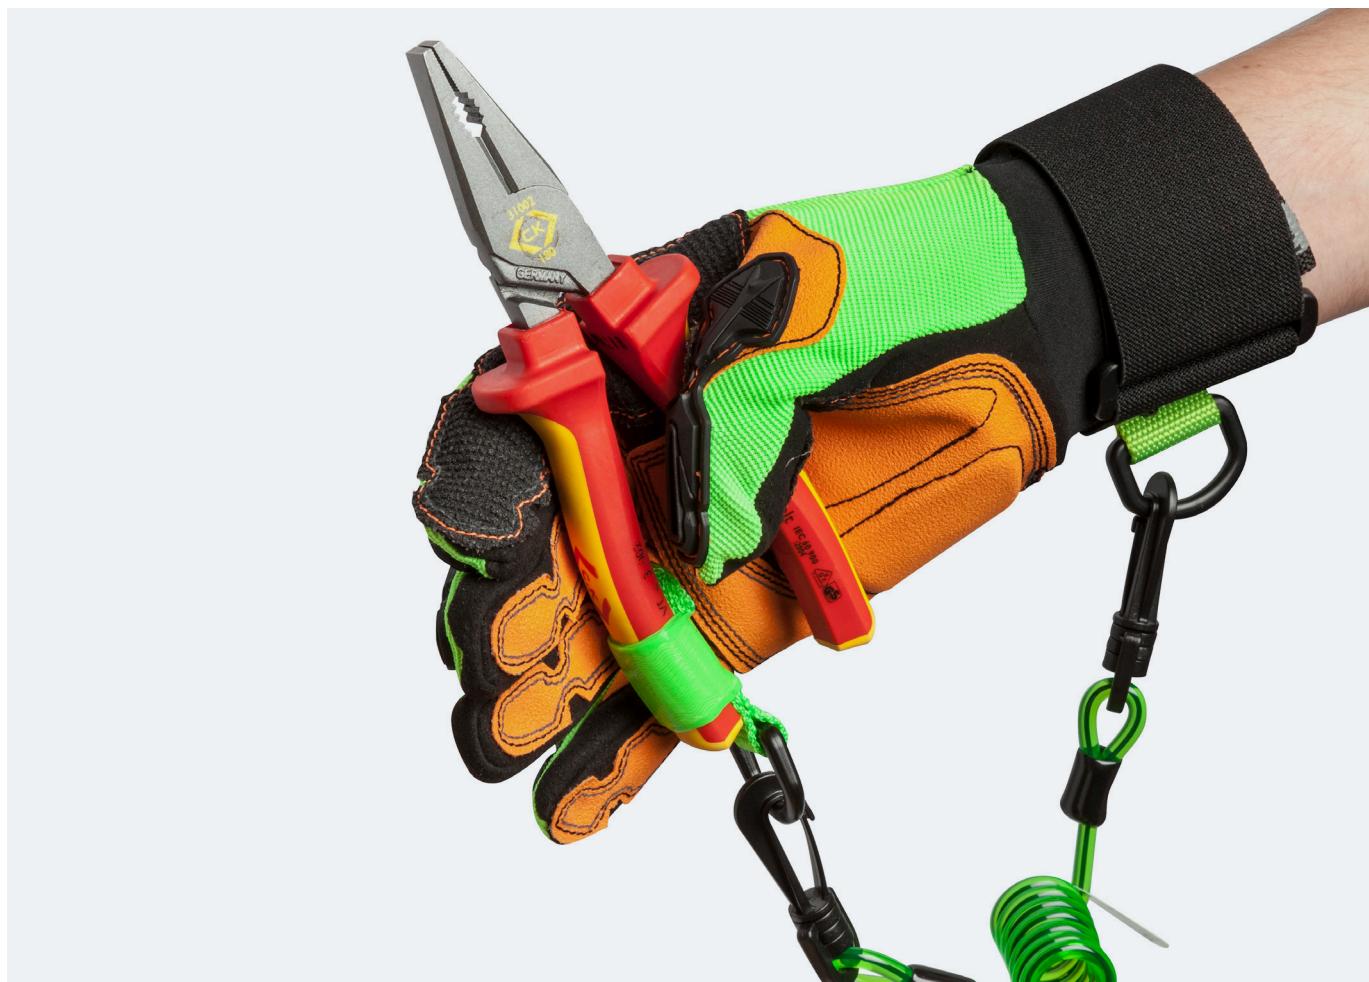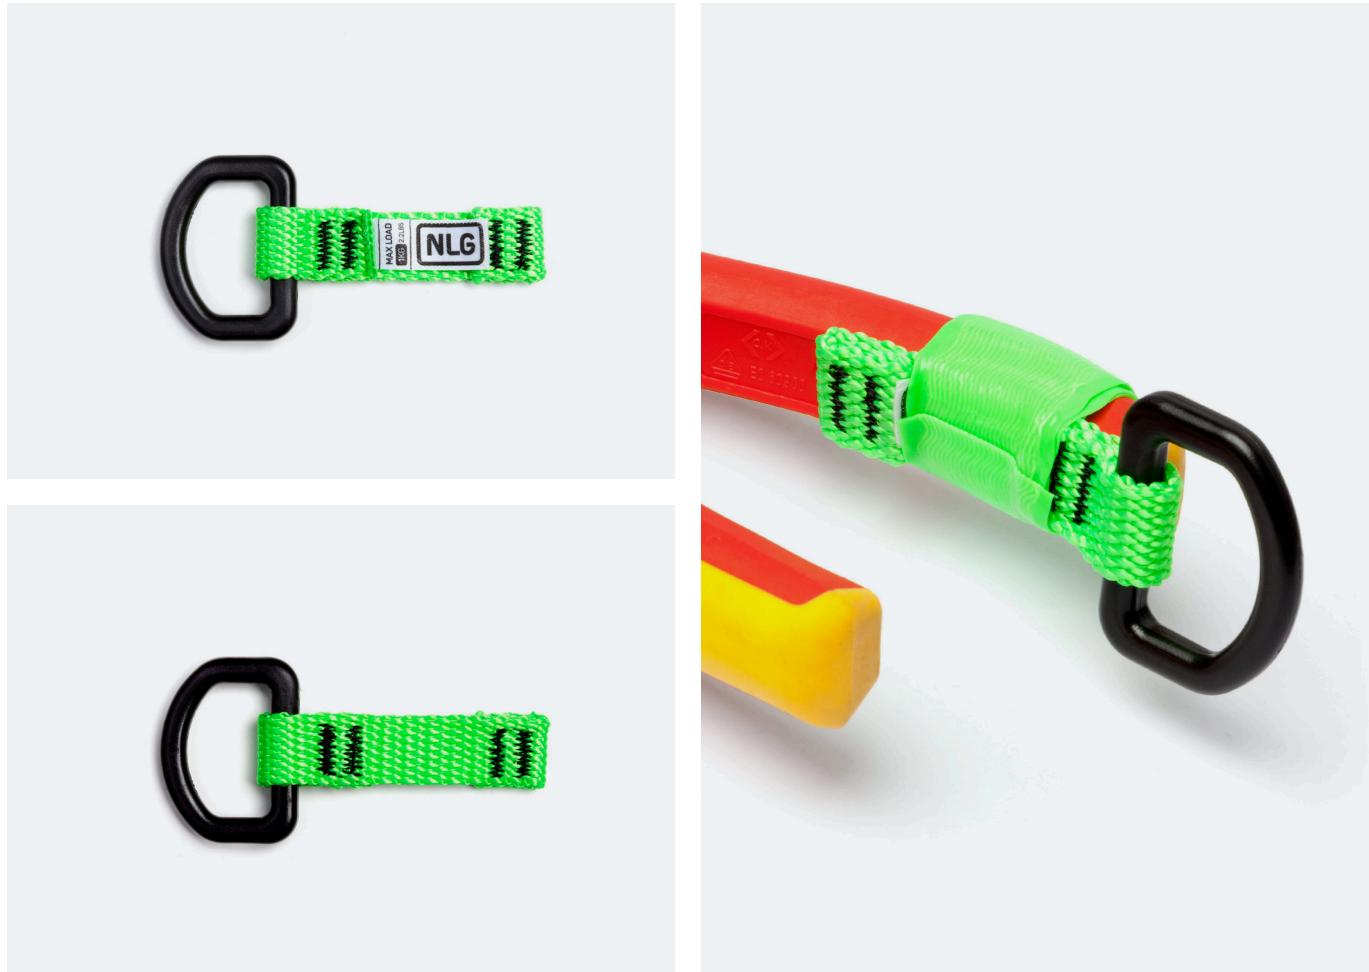

Breathe Safety Testing Laboratory

UKAS Testing No 8856 | Accredited to ISO/IEC17025/2005

**DROP TEST CERTIFICATE****IMAGE***After tests have been conducted***DATE**

June 2016

PRODUCT

D Ring Tether Non Conductive

REFERENCE

101375

MAX LOAD

1 KG

SAFETY FACTOR / TEST LOAD

2:1 / 2 KG

DYNAMIC DROP TEST RESULTS

	FACTOR 0	FACTOR 1	FACTOR 2
1	PASS	PASS	PASS
2	PASS	PASS	PASS
3	PASS	PASS	PASS

TECHNICIAN COMMENTS AND OBSERVATIONS

Stitching Intact.
 No elongation on webbing.
 Plastic D Ring in tact - no signs of visual wear or stress.

SIGNATURE

Gary Paterson
Senior Lab Technician

United Kingdom Accreditation Service
ACCREDITATION CERTIFICATE



TESTING LABORATORY
 No. 8856
 Breathe Safety Limited

Please note that the results included in this report relate only to the specific equipment samples tested. This is for the purpose of Type Approval of Equipment under the PPE Directive. For more detail refer to the full Accredited Laboratory Policy. This report may not be reproduced without authorisation from the laboratory. Any deviations from specific test methods are described in the relevant section of the report.

- Fully Equipped Laboratory for CE Type Approval Testing
- Product Trial testing for specific tests
- CE Technical File review and consultancy advice
- CE Certification facilitation through a partner Notified Body

0844 915 1111

17 Whittle Road, Ferndown Industrial Estate, Ferndown, Dorset BH21 7RL, UK



NLG Non-Conductive D Ring Tool Tether

Product code: 101375

View online

neverletgo.com/non-conductive-d-ring-tool-tether/

Get all the Product Briefs

neverletgo.com

Tool Tethering Experts
+44 [0]330 016 0030
neverletgo.com