




jalas® EXALTER 9988 GTX

EN ISO 20345:2011 S3, SRC, WR, HRO    ASTM F2413-18 M/I/C SD 35 PR

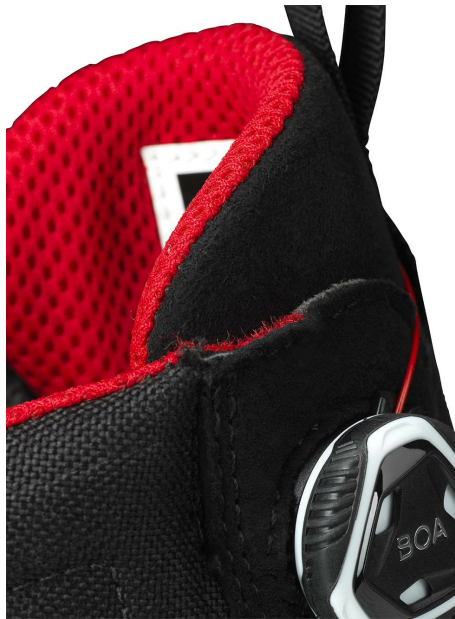

Learn more

A MID-CUT SAFETY SHOE, NOW WITH GORE-TEX

A light, comfortable, safety shoe with side-mounted BOA®. Waterproof due to GORE-TEX. Its Microfiber upper and sock-like construction provides great comfort and fit and has anti-static properties. The nitrile outer sole is heat and oil resistant for outstanding grip. It features also our JALAS® aluminium toe cap, plasma-treated textile puncture protection and double impact protection zones in PORON® XRD®.

CHARACTERISTICS

- Perfect fit
- Extra comfortable
- Excellent shock absorption
- High level of protection
- Excellent grip

FUNCTIONS

- Heat-resistant outsole
- Oil-resistant outsole
- Anti-static properties
- Waterproof
- Specially designed details
- Double shock absorption zones
- Polstered shaft edge
- Ventilating insole
- BOA® Fit System
- Conforms with IEC 61340-5-1 (ESD)
- Ergonomically shaped
- Quick-tie
- Stabilizator
- Soft
- Free from animal-derived materials
- GORE-TEX Performance Comfort Footwear technology



PREVENTS RISK OF

toe injuries, nail penetration, sprain injuries, antistatic, wet feet

PRIMARY ENVIRONMENTS OF USE

outdoors, all-year use, environments with risk for outsole penetration, wet environments, moist environments

SPECIFICATION

TYPE Safety footwear, Boots/Ankle boots

CATEGORY Cat. II

NAIL PROTECTION MATERIAL Plasma-treated composite (PTC) textile

FITTING Regular

COLLECTION Exalter

UPPER MATERIAL Microfiber, Textile

TOECAP MATERIAL Aluminium

LINING MATERIAL Polyamide

INSOLE FX3 Supreme

INNERSOLE MATERIAL Textile, Soft EVA, Rigid EVA, Polyester-based conductive thread, Neo foam, Poron® XRD®

MIDSOLE MATERIAL PU midsole

OUTSOLE MATERIAL Nitrile rubber outsole

FASTENING BOA® Fit System

COLOUR Black

NET WEIGHT, (SIZE 42) 1.16 kg

COMPLIANCE



Cat. II

EN ISO 20345:2011  
S3, SRC, WR, HRO



ASTM F2413-18  
M/I/C  
SD 35 PR

TP TC 019:2011



ÖNORM Z 1259



DGUV 112-191

FEATURES



Anti-static properties



Ergothan Shock Absorption System



ESD



Aluminium toecap



Oil-resistant outsole



Heat-resistant outsole



Waterproof



Nail protection in plasma-treated composite (PTC) textile



Stabilizer

| SIZE |     |      |      | ARTICLE NUMBER | EAN           |
|------|-----|------|------|----------------|---------------|
| EU   | UK  | US M | US W |                |               |
| 34   | 1½  | 2½   | 3½   | 9988-34        | 6408487534324 |
| 35   | 2   | 3½   | 4    | 9988-35        | 6408487534362 |
| 36   | 3   | 4    | 5    | 9988-36        | 6408487534409 |
| 37   | 4   | 5    | 6    | 9988-37        | 6408487534447 |
| 38   | 5   | 5½   | 6½   | 9988-38        | 6408487534485 |
| 39   | 6   | 6½   | 7½   | 9988-39        | 6408487534522 |
| 40   | 6½  | 7½   | 8½   | 9988-40        | 6408487534560 |
| 41   | 7   | 8    | 9    | 9988-41        | 6408487534607 |
| 42   | 8   | 9    | 10   | 9988-42        | 6408487534645 |
| 43   | 9   | 9½   | 11   | 9988-43        | 6408487534683 |
| 44   | 10  | 10½  | 11½  | 9988-44        | 6408487534720 |
| 45   | 10½ | 11   | 12½  | 9988-45        | 6408487534768 |
| 46   | 11  | 12   | 13   | 9988-46        | 6408487534805 |
| 47   | 12  | 13   | 14   | 9988-47        | 6408487534843 |

ejendals

Limavägen 28, SE-793 32 Leksand, Sweden

Phone +46 (0) 247 360 00 | info@ejendals.com | order@ejendals.com