EYEMAX™

Swiss One Safety have developed the Eyemax™ spectacles. Available in 5 different lens corrections, these spectacles guarantee visual comfort and protection. Supplied with a cord, these spectacles make your working life easier.


WEIGHT

24g

FEATURES

- Non-slip temples
- Lateral protection
- Lens correction from +1.0 to +3.0
- Supplied with a cord.



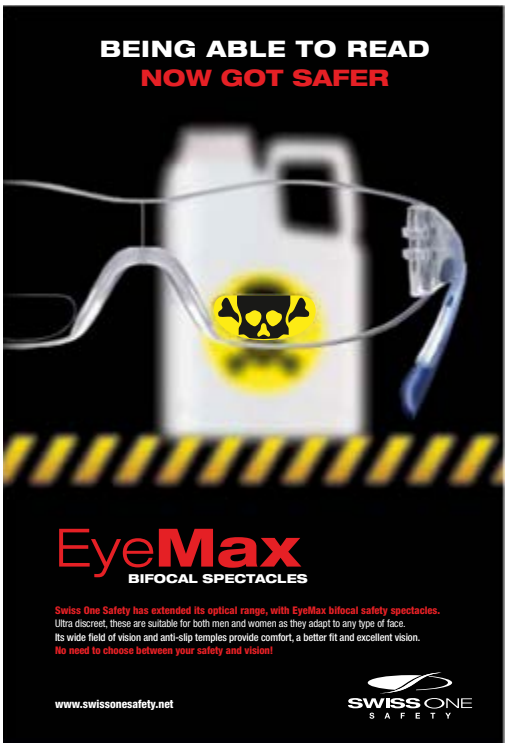



EYEMAXDISPBOX
delivered with 10p of each correction

	Reference	Lens Markings	Frame Markings	Lens Treatment	Conformity	
○	**1EYE23C1.0 (correction +1.0)**	2C-1.2 1 FT CE	EN 166 FT CE	Anti-scratch/Anti-fog	EN 166 EN 170	
○	**1EYE23C1.5 (correction +1.5)**	2C-1.2 1 FT CE	EN 166 FT CE	Anti-scratch/Anti-fog	EN 166 EN 170	
○	**1EYE23C2.0 (correction +2.0)**	2C-1.2 1 FT CE	EN 166 FT CE	Anti-scratch/Anti-fog	EN 166 EN 170	Conforms to EN 166:2001
○	**1EYE23C2.5 (correction +2.5)**	2C-1.2 1 FT CE	EN 166 FT CE	Anti-scratch/Anti-fog	EN 166 EN 170	EU Type Examination Certificate Number 690889 issued by BSI
○	**1EYE23C3.0 (correction +3.0)**	2C-1.2 1 FT CE	EN 166 FT CE	Anti-scratch/Anti-fog	EN 166 EN 170	
	EYEMAXDISPBOX					

For Lens & frames markings details, please refer to pages 7 to 9 in Swiss one catalogue.
For Lens technologies and colors details please refer to pages 10 to 12 in Swiss one catalogue.

Swiss One Safety, OX29 0TA UK - Technical helpline: +44(0)1993 826051 - email: technical@swissonesafety.net

EYEMAX™

SWISS ONE SAFETY

DIMENSIONS OF SPECTACLE

Lens Thickness:	2.3mm
Lens Base:	8.5
Lens Size (Diagonal):	42mm
Bridge:	20mm
Temple Length (Lens to tip):	112mm
Overall Width:	132mm
Closest point between temple tips:	90mm



1 Polycarbonate
2 Polycarbonate
3 Rubber
4 Polycarbonate

INSTRUCTIONS FOR USE

- In use ensure that the safety spectacles fit comfortably and securely on the head
- Ensure that the safety spectacles are in place, before entering the hazard area

CLEANING & MAINTENANCE

- The safety spectacles may be cleaned with soap and warm water and dried with a soft cloth
- Do not clean with chemical or abrasive cleaners
- The eye shield should be stored out of direct sunlight, away from chemicals and not exposed to extremes of temperature

LIMITATIONS OF USE

- Protection will only be offered if the safety spectacles are fitted correctly
- If the safety spectacles become scratched or damaged they should be replaced, likewise if the safety spectacles are subjected to severe impact they should be replaced immediately
- Do not apply paint, solvents, adhesives or self-adhesive labels, except in accordance with instructions from the manufacturer
- The safety spectacles, when in contact with the skin may cause allergic reactions to susceptible individuals. If this occurs leave the hazard area, remove the eye shield and seek medical advice
- The attention of users is also drawn to the dangers of modifying or removing any of the original component parts, other than as recommended by the manufacturer
- Eyemax™ is not suitable for protection against dusts, liquids or molten metals

DIMENSIONS OF INNER PACKAGING


Quantity:	10
Weight:	0.91kg



H Height: 96mm
L Length: 191mm
W Width: 284mm

DIMENSIONS OF OUTER PACKAGING

Quantity: (12 display boxes of 10 p)	120
Weight: (Approx.)	10.6kg



H Height: 54.5cm
L Length: 65.5cm
W Width: 35.5cm

Reference	EAN barcode Unit	EAN barcode inner packaging	EAN barcode outer packaging	Country of origin
1EYE23C1.0	7640139972873	5038428324526	5038428288002	China
1EYE23C1.5	7640139972880	5038428324533	5038428288019	China
1EYE23C2.0	7640139972897	5038428324557	5038428288026	China
1EYE23C2.5	7640139972903	5038428324564	5038428288033	China
1EYE23C3.0	7640139972910	5038428324571	5038428288040	China
EYEMAXDISPBOX	5038428234719	5038428328043	5038428328050	China