

Product Brief

# NLG Bungee Tool Lanyard

101372



# NLG Bungee Tool Lanyard

Product code: 101372

PRODUCT BRIEF / 101372

The Bungee Tool Lanyard is one of the most popular and versatile lanyards for starting tool tethering because of its easy-stretch durable webbing and anti-tangle 360 carabiner.

Widely recognised as the first choice in tool tethering, the NLG Bungee Lanyard is in a class of its own. The convenience of the self-retracting bungee webbing keeps the lanyard out of the way, ensuring it has minimal resistance to movement in the most gruelling reach work.

A dual action carabiner that rotates freely through 360° avoiding twists and tangles and the tough climbing cord loop allows attachment to an anchor point or directly to a captive hole or handle on the tool itself.

## Specification

- Lightweight, fully anodised aluminium carabiner with anti-tangle swivel mechanism
- High-performance secure locking gate prevents accidental opens
- Extended product life with high strength, wear resistant webbing
- Rugged climbing cord loop allows for quick cinching
- Faster visual inspections with contrast stitching
- Unique serial number for easy identification and tracking
- CE marked
- Dynamic load tested and third party certified [2:1 safety factor]
- Dimensions: Extends 80cm to 120cm
- Max Load: 5KG [11lbs]

---

### MAX LOAD [SWL]

5KG / 11LBS

---

### SERIAL NUMBERED

Makes the management of inspection routines and reports easy and traceable

---

### PRODUCT DATA



Weight: 90 Grams  
EAN [GTIN-13]: 5060572180246  
HTS Code: 5609.00.4000



Third party  
tested and  
certified

See the  
Test Certificate  
on page 5



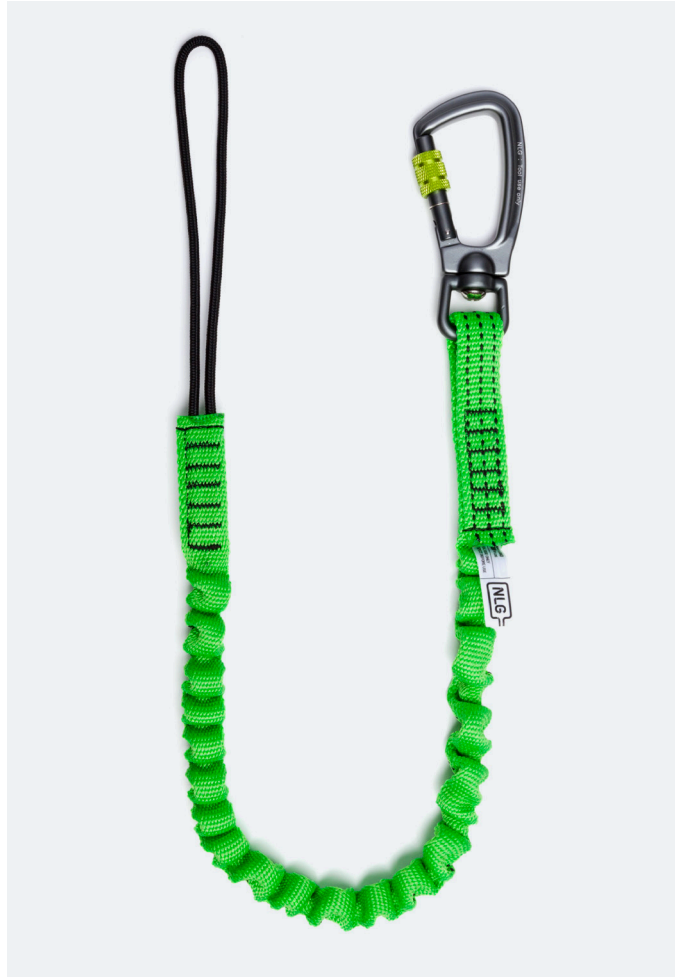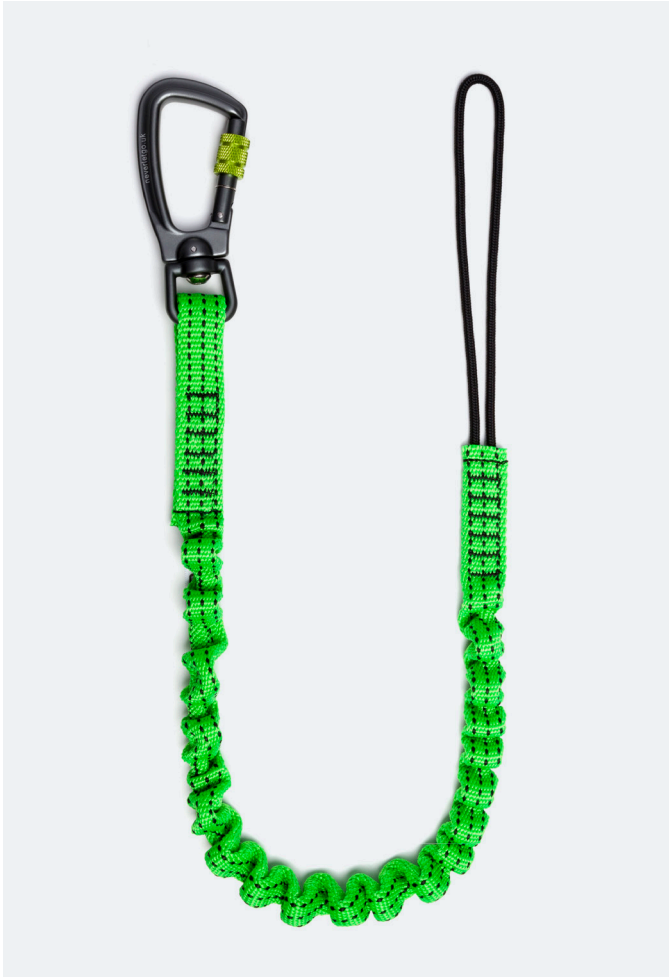

**Breathe Safety Testing Laboratory**

UKAS Testing No 8856 | Accredited to ISO/IEC17025/2005

**DROP TEST CERTIFICATE****IMAGE***After tests have been conducted***DATE**

June 2016

**PRODUCT**

Standard Bungee Lanyard

**REFERENCE**

101372

**MAX LOAD**

5 KG

**SAFETY FACTOR / TEST LOAD**

2:1 / 10 KG

**DYNAMIC DROP TEST RESULTS**

	FACTOR 0	FACTOR 1	FACTOR 2
1	PASS	PASS	PASS
2	PASS	PASS	PASS
3	PASS	PASS	PASS

**TECHNICIAN COMMENTS AND OBSERVATIONS**

No Elongation on the webbing  
 Elasticity retained at original level  
 No signs of stress on the webbing  
 Stitching intact  
 Hardware shows no sign of stress

**SIGNATURE**

**Gary Paterson**  
 Senior Lab Technician

United Kingdom Accreditation Service

ACCREDITATION CERTIFICATE



TESTING LABORATORY  
 No. 8856  
 Breathe Safety Limited

Please note that the results included in this report relate only to the specific equipment samples tested. This is for the purpose of Type Approval of Equipment under the PPE Directive. For more detail refer to the full Accredited Laboratory Policy. This report may not be reproduced without authorisation from the laboratory. Any deviations from specific test methods are described in the relevant section of the report.

- Fully Equipped Laboratory for CE Type Approval Testing
- Product Trial testing for specific tests
- CE Technical File review and consultancy advice
- CE Certification facilitation through a partner Notified Body

**0844 915 1111**

17 Whittle Road, Ferndown Industrial Estate, Ferndown, Dorset BH21 7RL, UK



# NLG Bungee Tool Lanyard

Product code: 101372

View online

[neverletgo.com/bungee-tool-lanyard/](https://neverletgo.com/bungee-tool-lanyard/)

Get all the Product Briefs

[neverletgo.com](https://neverletgo.com)

Tool Tethering Experts

+44 [0]330 016 0030

[neverletgo.com](https://neverletgo.com)